


Elevator and Door Control

Compact Elevator Drive MH300-L

Compact Design with Open-Loop Control for Precise Time Sequence



- Supports asynchronous motors with open-loop control
- Precise control of S curve performs smooth start and stop for a comfortable ride
- Compact design and user-friendly operation
- Emergency Power Supply (EPS) / Automatic Rescue Device (ARD) and sequence control functions for elevator applications
- Built-in 5-digit 16-segment LCD digital keypad
- Built-in EMC filter^(optional) complies with EN 12015 / EN 12016 standards for lift applications
- Built-in brake chopper to enhance braking capability
- 7 digital inputs (extension up to 10) and 1 relay output (extension up to 3)
- Integrated Safe Torque Off (STO) SIL2

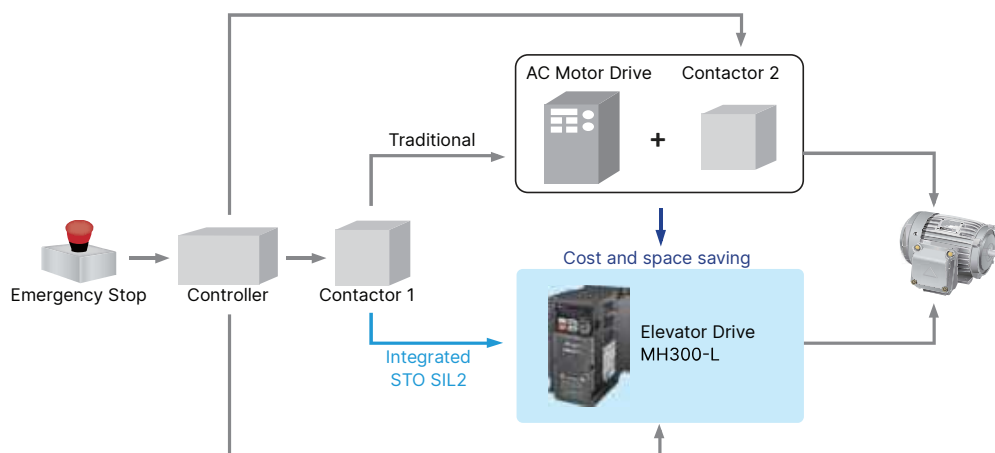

Power Range	2.2kW 3HP	3.7kW 5HP	5.5kW 7.5HP	7.5kW 10HP	11kW 15HP	15kW 20HP
MH300-L	230V/3-phase					
	460V/3-phase					



Applications

Low floor residential building, IM open-loop elevators of villas